


<h1>UL1185</h1>	隔离线 Shielded wire
	绝缘 PVC 被覆隔离线 Insulation PVC shielded wire

产品说明 Product description

- | | |
|----------------------------|--|
| ● 额定 80°C, 300V | ◆ Rating 80°C, 300V |
| ● 标准 UL Subject 758 | ◆ Standard UL Subject 758 |
| ● 特性 | ◆ Features |
| 1. 难燃性 UL: VW-1, CSA: FT1 | 1. Flammability VW-1, FT1 |
| ● 用途 | ◆ Application |
| 1. 电器回路传输线路之内部配线及仪表用线 | 1. Internal wiring of electrical equipment |
| ● 构造 | ◆ Construction |

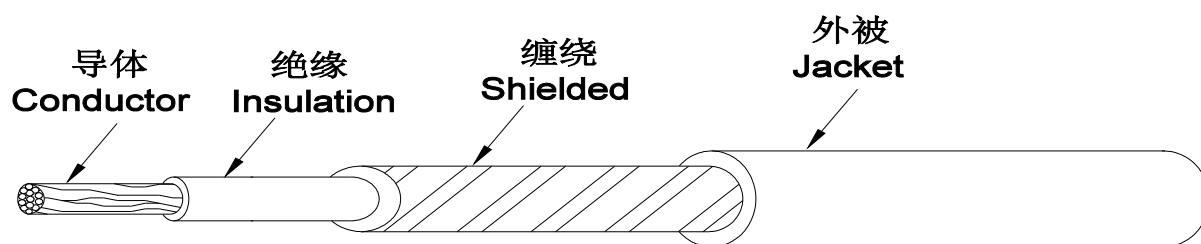

印字/Marking: EVERTOP (S) E117873 兄 AWM STYLE 1185 (16-30) AWG VW-1SC 80°C 300V
 CSA LL82009 AWM I A (16-30)AWG 80°C 300V FT1 LM

Part No	导体 Conductor		绝缘体 Insulation		外径 Dia	最大导体电阻
	AWG Size	构成 Stranding No. /mm	绝缘外径 Dia (mm)	缠绕遮蔽层 Spiral Shield (No. /mm)	Overall Diameter (mm)	Max. cond. resistance at 20°C (Ω /km)
S118530	30	7/0.10	0.88	28/0.10	2.2	381
S118528	28	7/0.127	0.95	32/0.10	2.5	239
S118526	26	7/0.16	1.3	36/0.12	3.0	150
S118524	24	7/0.20	1.4	40/0.12	3.0	94.2
S118522	22	17/0.16	1.6	42/0.10	3.0	59.4
S118520	20	21/.0178	1.8	45/0.12	3.2	36.7
S118518	18	72/0.12	2.1	53/0.12	3.5	23.2
S118517	17	92/0.12	2.1	82/0.12	4.2	18.3
S118516	16	65/0.16	2.4	115/0.12	4.2	14.6