


UL1354	同轴线 Coaxial Cable
	RG-同轴线 RG-Coaxial Cable

### ■ 产品说明 Product description

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>● <b>额定</b>            80°C, 30V</li> <li>● <b>标准</b>            UL Subject 758</li> <li>● <b>特性</b> <ul style="list-style-type: none"> <li>1. 难燃性 UL: VW-1, CSA: FT1</li> </ul> </li> <li>● <b>用途</b> <ul style="list-style-type: none"> <li>1. 适用于区域网络, 信号控制系统回路。</li> <li>2. 电视机, 音响, 广播设备及数据传输系统</li> </ul> </li> <li>● <b>构造</b></li> </ul> | <ul style="list-style-type: none"> <li>◆ <b>Rating</b>            80°C, 30V</li> <li>◆ <b>Standard</b>        UL Subject 758</li> <li>◆ <b>Features</b> <ul style="list-style-type: none"> <li>1. Flammability VW-1, FT1</li> </ul> </li> <li>◆ <b>Application</b> <ul style="list-style-type: none"> <li>1. Coaxial cable for local area networks ,<br/>Signal control systems.</li> <li>2. TV , Radio , Broadcast equipment ,<br/>Data transmission</li> </ul> </li> <li>◆ <b>Constructio</b></li> </ul> |
|---|--|

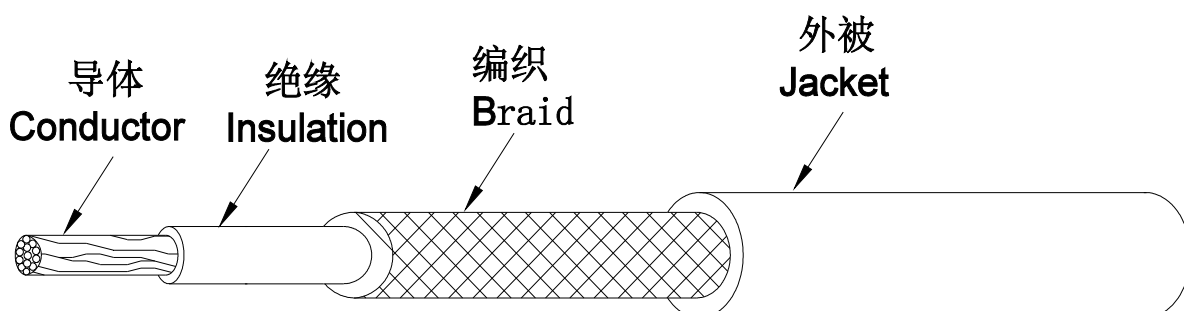

印字/Marking: EVERTOP (S) E117873 兄 AWM STYLE 1354 (28-30)AWG VW-1 80°C 30V LM

Part No	导体 Conductor		绝缘 Insulation			外被 Jacket	
	构成 Stranding No. /mm	AWG Size	材料 Material	绝缘外径 Diameter (mm)	编织层 Braid (No. /mm)	外径 Diameter (mm)	颜色 Color
C135428	28	7/0.127	PE	1.6	16/6/.10	2.8	黑 Black
C135430	30	7/0.10	PE	1.3	16/4/0.10	2.5	黑 Black

**备注**

最大导体电阻(20°C时):28# 239Ω/Km  
 最大导体电阻(20°C时):30# 381Ω/Km  
 最小绝缘电阻(20°C时):0.762MΩ/Km

**Note**

Max conductor resistance at20°C:28# 239Ω/Km  
 Max conductor resistance at20°C:30# 381Ω/Km  
 Min.insulation resistance at20°C:0.762MΩ/Km