


UL2468	PVC 电线 Pvc wire 设备内配线用电线 Appliance wiring material
--------	---

■ 产品说明 Product description

- | | |
|--|--|
| <ul style="list-style-type: none"> ● 额定 80°C, 300V ● 标准 UL Subject 758 ● 特性 <ul style="list-style-type: none"> 1. 难燃性 UL: VW-1, CSA: FT1 ● 用途 <ul style="list-style-type: none"> 1. 电气回路内部配线及仪表配线 ● 构造 | <ul style="list-style-type: none"> ◆ Rating 80°C, 300V ◆ Standard UL Subject 758 ◆ Features <ul style="list-style-type: none"> 1. Flammability VW-1, FT1 ◆ Application <ul style="list-style-type: none"> 1. Internal wiring of electrical and electronic equipment ◆ Construction |
|--|--|

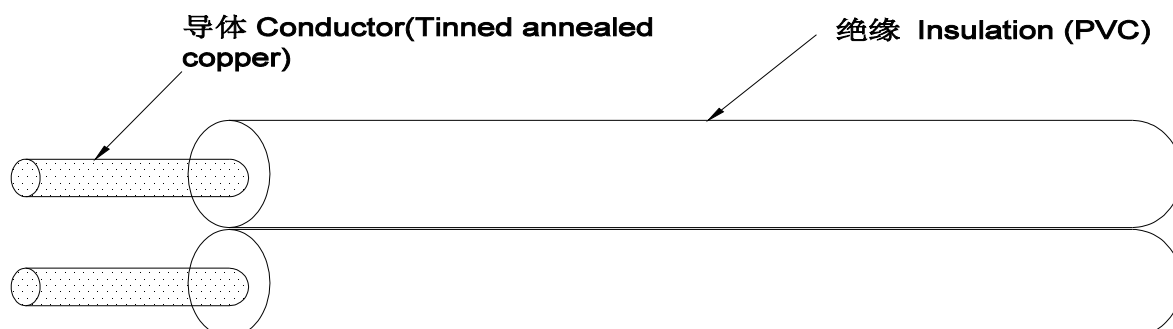

印字/Marking: EVERTOP (S) E117873 兄 AWM STYLE 2468 (16~28)AWG VW-1 80°C 300V
 CSA LL82009 AWM IA 80°C 300V FT1 LM

Part No	导体 Conductor		绝缘体 Insulation		外径 Dia	最大导体电阻
	AWG Size	构成 Stranding No. /mm	绝缘厚度 Insulation Thickness	材料 Material	Overall Diameter (mm)	Max. cond. resistance at 20°C (Ω /km)
E246828	28	7/0.127	0.38	PVC	1.3*2.6	239
E246826	26	7/0.16	0.38	PVC	1.5*3.0	150
E246824	24	20/0.12	0.38	PVC	1.7*3.4	94.2
E246822	22	17/0.16	0.38	PVC	1.8*3.6	59.4
E246820	20	26/0.16	0.38	PVC	1.9*3.8	36.7
E246818	18	41/0.16	0.38	PVC	2.2*4.4	23.2
E246816	16	65/0.16	0.38	PVC	2.5*5.0	14.6