


UL2547	隔离线 Shielded wire
	绝缘 PVC 被覆隔离线 Insulation PVC shielded wire

■ 产品说明 Product description

- | | |
|--|--|
| <ul style="list-style-type: none"> ● 额定 80°C, 300V ● 标准 UL Subject 758 ● 特性 <ul style="list-style-type: none"> 1. 难燃性 UL: VW-1, CSA: FT1 ● 用途 <ul style="list-style-type: none"> 1. 电器回路传输线路之内部配线及仪表用线 ● 构造 | <ul style="list-style-type: none"> ◆ Rating 80°C, 300V ◆ Standard UL Subject 758 ◆ Features <ul style="list-style-type: none"> 1. Flammability VW-1, FT1 ◆ Application <ul style="list-style-type: none"> 1. Internal wiring of electrical equipment ◆ Construction |
|--|--|

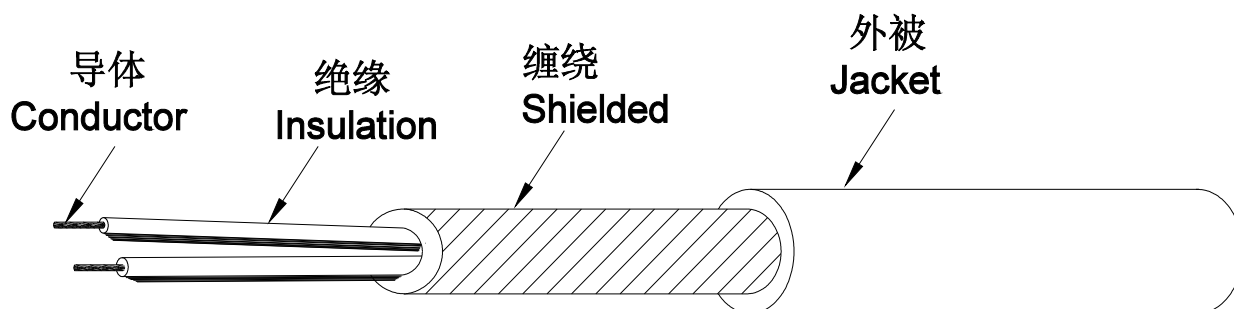

印字/Marking: EVERTOP (S) 兄 E117873 STYLE 2547 (18-30) AWG VW-1 80°C 300V CS
 -A LL82009 AWM I A 80°C300V FT1 LM

Part No	导体 Conductor		绝缘体 Insulation		外径 Dia	最大导体电阻
	AWG Size	构成 Stranding No. /mm	绝缘外径 Dia (mm)	缠绕遮蔽层 Spiral Shield (No. /mm)	Overall Diameter (mm)	Max. cond. resistance at 20°C (Ω/km)
S254730	30	7/0.10	0.9	53/0.10	2.7	381
S254728	28	7/0.127	0.95	47/0.12	2.8	239
S254726	26	7/0.16	1.1	53/0.12	3.0	150
S254724	24	11/0.16	1.2	53/0.12	3.3	94.2
S254722	22	17/0.16	1.4	45/0.12	3.7	59.4
S254720	20	26/0.16	1.5	72/0.10	4.0	36.7
S254718	18	16/0.254	1.8	80/0.12	4.5	23.2