


| | |
|---------------|--|
| UL3385 | 低烟无卤电子线 Low smoke halogen-free wire |
| | 设备内配线用电线 Appliance wiring material |

■ 产品说明 Product description

- | | |
|--|---|
| <ul style="list-style-type: none"> ● 额定 105°C, 300V ● 标准 UL Subject 758 ● 特性 <ul style="list-style-type: none"> 1. 难燃性 UL: VW-1, CSA: FT1 ● 用途 <ul style="list-style-type: none"> 1. 电气, 电子设备的内部配线及仪表配线 ● 构造 | <ul style="list-style-type: none"> ◆ Rating 105°C, 300V ◆ Standard UL Subject 758 ◆ Features <ul style="list-style-type: none"> 1. Flammability VW-1, FT1 ◆ Application <ul style="list-style-type: none"> 1. Internal wiring of electrical and electronic equipment ◆ Construction |
|--|---|

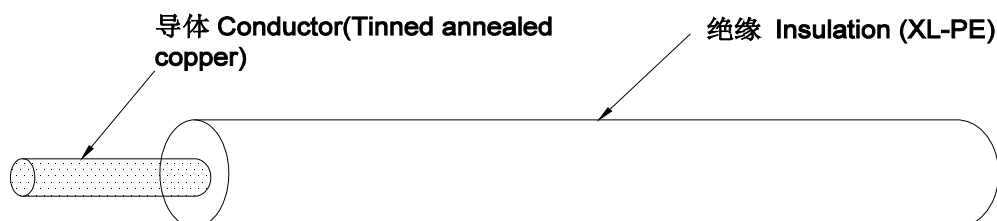

印字/Marking: EVERTOP (S) E117873 兄 AWM STYLE 3385 (10~30)AWG VW-1 105°C 300V CSA LL82009 AWM I A 105°C 300V FT1 LM (XL-PE)

| Part No | 导体 Conductor | | 绝缘体 Insulation | | 外径 Dia | 最大导体电阻 |
|---------|--------------|----------------------|---------------------------|-------------|-----------------------|--------------------------------------|
| | AWG Size | 构成 Stranding No. /mm | 绝缘厚度 Insulation Thickness | 材料 Material | Overall Diameter (mm) | Max. cond. resistance at 20°C (Ω/km) |
| E338530 | 30 | 7/0.10 | 0.38 | XL-PE | 1.1 | 381 |
| E338528 | 28 | 7/0.127 | 0.38 | XL-PE | 1.2 | 239 |
| E338526 | 26 | 7/0.16 | 0.38 | XL-PE | 1.3 | 150 |
| E338524 | 24 | 11/0.16 | 0.38 | XL-PE | 1.4 | 94.2 |
| E338522 | 22 | 17/0.16 | 0.38 | XL-PE | 1.6 | 59.4 |
| E338520 | 20 | 21/0.178 | 0.38 | XL-PE | 1.8 | 36.7 |
| E338518 | 18 | 34/0.178 | 0.38 | XL-PE | 2.1 | 23.2 |
| E338516 | 16 | 26/0.254 | 0.38 | XL-PE | 2.4 | 14.6 |
| E338514 | 14 | 41/0.254 | 0.38 | XL-PE | 2.7 | 8.96 |
| E338512 | 12 | 65/0.254 | 0.38 | XL-PE | 3.2 | 5.64 |
| E338510 | 10 | 105/0.254 | 0.38 | XL-PE | 3.8 | 3.546 |