


<b>UL3386</b>	低烟无卤电子线 Low smoke halogen-free wire
	设备内配线用电线 Appliance wiring material

### ■ 产品说明 Product description

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>● <b>额定</b>      105°C, 600V</li> <li>● <b>标准</b>      UL Subject 758</li> <li>● <b>特性</b> <ul style="list-style-type: none"> <li>1. 难燃性 UL: VW-1, CSA: FT1</li> </ul> </li> <li>● <b>用途</b> <ul style="list-style-type: none"> <li>1. 电气, 电子设备的内部配线及仪表配线</li> </ul> </li> <li>● <b>构造</b></li> </ul> | <ul style="list-style-type: none"> <li>◆ <b>Rating</b>      105°C, 600V</li> <li>◆ <b>Standard</b>    UL Subject 758</li> <li>◆ <b>Features</b> <ul style="list-style-type: none"> <li>1. Flammability VW-1, FT1</li> </ul> </li> <li>◆ <b>Application</b> <ul style="list-style-type: none"> <li>1. Internal wiring of electrical and electronic equipment</li> </ul> </li> <li>◆ <b>Construction</b></li> </ul> |
|--|---|

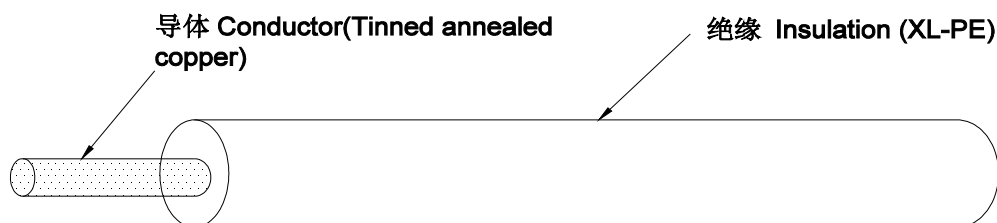

印字/Marking: EVERTOP (S) E117873 兄 AWM STYLE 3386 (16~30)AWG VW-1 105°C 600V CSA LL82009 AWM I A 105°C 600V FT1 LM (XL-PE)

Part No	导体 Conductor		绝缘体 Insulation		外径 Dia	最大导体电阻
	AWG Size	构成 Stranding No. /mm	绝缘厚度 Insulation Thickness	材料 Material	Overall Diameter (mm)	Max. cond. resistance at 20°C (Ω/km)
E338630	30	7/0.10	0.76	XL-PE	1.85	381
E338628	28	7/0.127	0.76	XL-PE	2.0	239
E338626	26	7/0.16	0.76	XL-PE	2.1	150
E338624	24	11/0.16	0.76	XL-PE	2.15	94.2
E338622	22	17/0.16	0.76	XL-PE	2.35	59.4
E338620	20	21/0.178	0.76	XL-PE	2.5	36.7
E338618	18	34/0.178	0.76	XL-PE	2.75	23.2
E338616	16	26/0.254	0.76	XL-PE	3.10	14.6